
TECHNICAL INFORMATION _ **CAT. N. YBPE-6A##-TC-1**

45° TRI-CLAMP EXTENDED CONNECTION

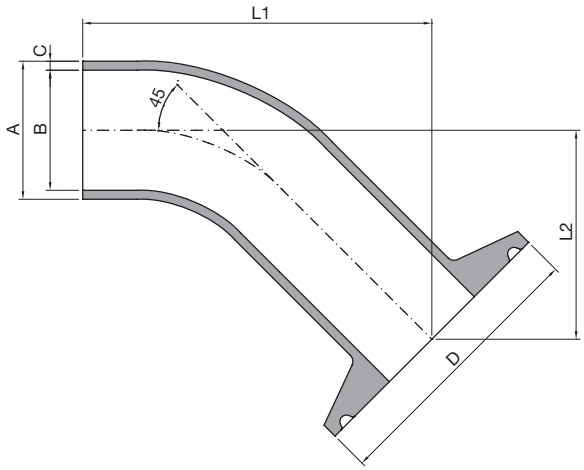

Clean and Aseptic Valves of CAD Product Line have simple and safe design, with their full drainability, without asymptotic seal and dead leg, are offering fast cleanability and sterilization practices. They are designed to fulfil stringent demands of CIP-SIP and Production Cycles on Aseptic Processing.

45° Tri-Clamp Fittings Upgrade. Design according to ASME-BPE regulation. Tri-Clamp and elbow made in AISI 316L - 1.4435-BN2.

CODE	CAD SIZE	TC SIZE	A mm (inch)	B mm (inch)	C mm (inch)	D mm (inch)	L1 mm (inch)	L2 mm (inch)
YBPE-6A12-TC-1	A12	1/2”	12,70 (0,50)	9,40 (0,37)	1,65 (0,065)	25,00 (0,98)	44,00 (1,73)	23,50 (0,93)
YBPE-6A19-TC-1	A19	3/4”	19,05 (0,75)	15,75 (0,62)	1,65 (0,065)	25,00 (0,98)	44,00 (1,73)	23,50 (0,93)
YBPE-6A25-TC-1	A25	1”	25,40 (1,00)	22,10 (0,87)	1,65 (0,065)	50,40 (1,98)	64,00 (2,52)	38,00 (1,50)
YBPE-6A38-TC-1	A38	1,1/2”	38,10 (1,50)	34,80 (1,37)	1,65 (0,065)	50,40 (1,98)	77,50 (3,05)	44,00 (1,73)
YBPE-6A50-TC-1	A50	2”	50,80 (2,00)	47,50 (1,87)	1,65 (0,065)	64,00 (2,52)	99,50 (3,92)	53,00 (2,09)
YBPE-6A63-TC-1	A63	2,1/2”	63,50 (2,50)	60,20 (2,37)	1,65 (0,065)	77,50 (3,05)	113,00 (4,45)	58,50 (2,30)
YBPE-6A76-TC-1	A76	3”	76,20 (3,00)	72,90 (2,87)	1,65 (0,065)	91,00 (3,58)	177,00 (6,97)	85,00 (3,35)
YBPE-6A00-TC-1	A00	4”	101,60 (4,00)	97,39 (3,83)	2,11 (0,083)	119,00 (4,69)	215,00 (8,47)	101,00 (3,98)

Tri-Clamp design according to ASME BPE
Tri-Clamp material: 1.4435 - BN2
Elbow design according to ASTM® A269/270 - ASME BPE
Elbow material: 1.4435 - BN2

Rattiinox s.r.l Via Pietro Mascagni 10/12 22066 Mariano Comense (Como) Italy
T. +39.031.355126 info@rattiinox.com www.rattiinox.com